
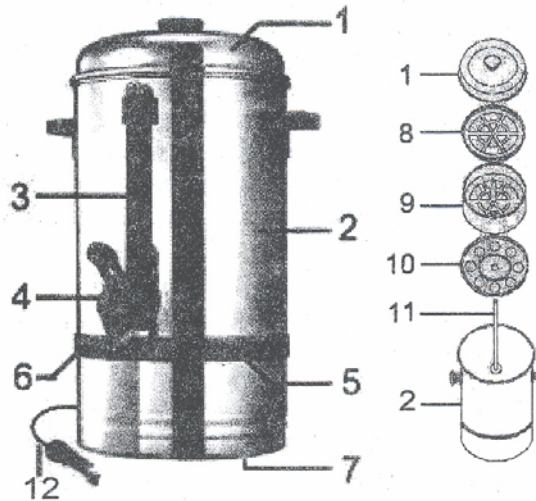


Operating Instructions

PERCOLATOR WATER BOILER

CE



Model No.: CP-40, CP-60, CP-100
Volt: 120V
Wattage: Max. 1350W.
Capacity: CP-40, 40 Cups, CP-60,
60 Cups, CP-100, 100 Cups

Warnings:

- **Never** immerse the machine in the water. If the machine has been soaked, it must be completely dried before using again.
- When the machine is in use, parts of the machine are very hot. Do not touch the hot parts and keep power cord away from hot parts.
- **Be careful** not to pour any water on or near power cord.
- Stay in vicinity of machine while it is in operation.
- Always use handles to transport machine.
- Make sure machine is placed on a strong, horizontal surface before using.
- Unplug appliance when not in use. Allow appliance to cool before removing parts or emptying coffee grounds.
- Scalding may occur if the lid is removed during the brewing cycle.

Parts of the Percolator

(Please check parts before installation)

1. Cover
2. Urn Body
3. Level Indicator
4. Faucet
5. Power Switch
6. Indicator Lamp
7. Urn Base
8. Basket Cover
9. Filter Basket
10. Basket Tray
11. Percolator Tube
12. Cord
13. Bottom of Urn
14. Heating Element

Operating Instructions for Brewing Coffee:

1. Clean the Filter Basket, Cover, Percolator Tube and the inside of tank with a non-abrasive detergent.
2. Pour cool water into the Urn to fill at least half of total capacity of the Urn.
3. Cover the Filter Basket by the Basket Cover.
4. Center the Percolator Tube into the Basket Tray and make sure that the foot of the Tube is positioned firmly on the well of the Urn.
5. Center the Filter Basket into the Percolator Tube and place ground coffee in the Basket. Then cover back with the Basket Cover and the Cover of the Urn.
6. Plug the cord into the electric outlet and turn the Power Switch "ON", the lamp in the switch should light up now.
7. When the Indicator Lamp lights up, the brewing process is completed.
8. The second Heating System will start to operate automatically to keep the coffee warm, coffee is now ready to be served.
9. When there are only about 3 cups of coffee left in the Urn, please turn the Power Switch "OFF" and unplug the Cord from the electric outlet.
10. To reheat cold coffee in the Urn, there must be at least 12 cups of coffee in the tank to reheat. And simply replug the cord into the electric outlet and turn the Power Switch "ON".

Sediment Removal:

On areas of the Heating Element, hard water will cause chalk and limestone to accumulate over time. We recommend you clean the percolator and remove residue due to over use.

1. Pour 100 ml. fresh lemon juice or condensed lemon juice into the Urn Body.
2. Wait 5-6 minutes to allow the lemon juice to run through the sediments.
3. You can use a brush with soft bristles clean the heating element.
4. Repeat steps 1-3 until limestone is removed.
5. Use a dry cloth to wipe the lemon juice away.
6. Pour some clean water into the Urn, rinse until there is no more lemon smell.

Disclaimer: The Manufacturer will accept no liability for any injury or damage caused by incorrect usage of the machine or by improper operation contrary to information given in this instruction manual.

**WARNING: DO NOT TOUCH APPLIANCE
DURING USE. IT IS VERY HOT!**

ADCRAFT™